



FG-06-1



FG-13-1



FG-13-2



FG-13-1F



FG-26H-20



FG-26H-10F



FG-50H-2



FG-50H-1F



FG-25T

Modelo	Capacidade Disco		Acionamento	Velocidade rpm	Potência Hp	Comprimento mm	Peso Kg	Consumo de Ar m ³ /min	Encaixe da Mangueira PT	Mangueira pol
	mm	pol								
FG-06-1	3	1/8	Anel Giratório	60.000	0.14	153	0.15	0.17	1/4	5/32
FG-13-1	3	1/8	Alavanca	30.000	0.21	158	0.30	0.25	1/4	1/4
FG-13-1F	3	1/8	Alavanca	30.000	0.21	158	0.30	0.25	1/4	1/4
FG-13-2	3	1/8	Anel Giratório	30.000	0.21	150	0.40	0.25	1/4	1/4
FG-26H-20	6	1/4	Anel Giratório	24.000	0.42	170	0.61	0.59	1/4	1/4
FG-26H-10F	6	1/4	Anel Giratório	24.000	0.36	179	0.53	0.58	1/4	1/4
FG-50H-1F	6	1/4	Alavanca	18.000	0.46	180	0.80	0.43	1/4	3/8
FG-50H-2	6	1/4	Anel Giratório	18.000	0.46	180	0.80	0.43	1/4	3/8
FG-25T	6	-	Gatilho	20.000	0.34	152	0.50	0.50	1/4	3/8



FG-26HL-20



FG-26HL-10F



FG-3H-5



FG-3H-5F

Modelo com Pinça

FG-26HL-10F	6	1/4	Alavanca	24.000	0.38	263	0.74	0.59	1/4	3/8
FG-26HL-20	6	1/4	Anel Giratório	24.000	0.37	272	0.65	0.57	1/4	3/8
FG-3H-5	6	1/4	Anel Giratório	14.600	0.64	297	1.5	0.40	3/8	3/8
FG-3H-5F	6	1/4	Alavanca	14.600	0.64	297	1.5	0.40	3/8	3/8


ESMERILHADEIRAS



FG-3H-1




FG-4H-1, 2



FG-4H-1F, 2F



FG-5H-1M, 2M, 6H-1M

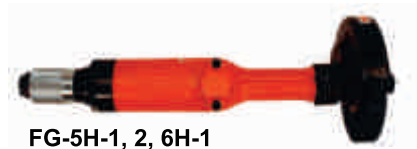

FG-5H-1, 2, 6H-1



FG-8H-1M, 2M



FG-8H-1

Modelo	Capacidade do disco	Eixo	Velocidade	Potência	Comprimento	Peso	Consumo de Ar	Encaixe da Mangueira	Mangueira
	mm	pol	rpm	Hp	mm	Kg	m³/min	PT	pol
FG-3H-1	65	1/2 x 3/8	14.600	0.65	317	1.4	0.55	3/8	3/8
FG-4H-1	100	3/4 x 3/8	9.500	0.95	383	2.1	0.80	3/8	1/2
FG-4H-1F	100	3/4 x 3/8	9.500	0.95	408	2.3	0.80	3/8	1/2
FG-4H-2	100	3/4 x 1/2	9.500	0.95	389	2.1	0.80	3/8	1/2
FG-4H-2F	100	3/4 x 1/2	9.500	0.95	389	2.3	0.80	3/8	1/2
FG-5H-1	125	3/4 x 1/2	7.600	1.30	405	2.7	1.00	3/8	1/2
FG-5H-1M	125	3/4 x 1/2	7.600	1.30	506	5.5	1.00	3/8	1/2
FG-5H-2	125	3/4 x 5/8	7.600	1.30	410	2.8	1.00	3/8	1/2
FG-5H-2M	125	3/4 x 5/8	7.600	1.30	511	2.5	1.00	3/8	1/2
FG-6H-1	150	1 x 5/8	6.300	1.40	434	3.5	1.20	3/8	1/2
FG-6H-1M	150	1 x 5/8	6.300	1.40	531	3.5	1.20	3/8	1/2
FG-8H-1	205	1 x 5/8	4.600	2.00	472	5.4	1.60	1/2	1/2
FG-8H-1M	205	3/4 x 1/2	4.600	2.00	556	5.5	1.60	1/2	1/2
FG-8H-2M	180	3/4 x 1/2	5.300	2.17	556	5.4	1.80	1/2	1/2



FG-50L-1



FG-50Y-1



FG-3HL-1



FG-4HL-1F



FG-4HL-1



FG-5HL-2



FG-5HL-2M

Modelos com Eixo Longo

Modelo	Capacidade Disco	Eixo	Velocidade	Potência	Comprimento	Peso	Consumo de Ar	Encaixe da Mangueira	Mangueira
	mm	pol	rpm	Hp	mm	Kg	m³/min	PT	pol
FG-50L-1	50	1/2 x 3/8	18.000	0.40	307	1.30	0.43	1/4	3/8
FG-50Y-1	50	1/2 x 3/8	18.000	0.40	523	1.90	0.43	1/4	3/8
FG-3HL-1	65	1/2 x 3/8	12.000	0.65	522	1.80	0.55	3/8	3/8
FG-4HL-1	75	3/4 x 3/8	12.000	0.95	585	2.70	1.00	3/8	1/2
FG-4HL-1F	75	3/4 x 3/8	12.000	0.95	615	2.60	1.00	3/8	1/2
FG-5HL-2	100	3/4 x 1/2	9.000	1.30	953	5.30	1.00	3/8	1/2
FG-5HL-2M	100	3/4 x 1/2	9.000	1.30	1.057	5.50	1.00	3/8	1/2

FA-20-1



FA-20-2



FA-20-2F



FA-30-3F



Modelo	Capacidade Disco	Cabeçote	Velocidade	Potência	Comprimento	Peso	Consumo de Ar	Encaixe da Mangueira	Mangueira
	mm	mm	rpm	Hp	mm	Kg	m³/min	PT	pol
FA-20-1	50	40,5	15.000	0.40	157	0.60	0.59	1/4	3/8
FA-30-3	100	56	13.500	0.66	181	1.1	0.68	1/4	3/8
FA-30-3F	100	56	13.500	0.65	202	1.1	0.65	1/4	3/8

Modelo com Pinça

FA-20-2	Pinça 6mm - 1/4	83	15.000	0.38	157	0.60	0.59	1/4	3/8
FA-20-2F	Pinça 6mm - 1/4	83	15.000	0.38	186	0.60	0.59	1/4	3/8

FA-4C-1F



FA-40-1F



FA-45-12F



FA-45-1



FA-6C-10



FA-6C-12M



FA-7E-1VF, 6VF, 8VF



FA-9C-2M



FA-9C-4M



FA-150KG-7 (120°)



FA-150K-20 (120°)



Modelo	Capacidade Disco	Cabeçote	Velocidade	Potência	Comprimento	Peso	Consumo de Ar	Encaixe da Mangueira	Mangueira
	mm	mm	rpm	Hp	mm	Kg	m³/min	PT	pol
FA-4C-1	100	77	13.500	0.74	210	1.80	0.55	3/8	3/8
FA-4C-1F	100	77	13.500	0.74	266	1.80	0.55	3/8	3/8
FA-40-1F	100	73,5	13.500	1.34	247	1.90	0.55	3/8	3/8
FA-5C-4	125	85	12.000	0.95	229	2.20	0.95	3/8	3/8
FA-45-1	125	70	10.900	1.48	208	2.00	1.09	3/8	3/8
FA-45-12F	125	70	12.000	1.34	259	2.21	1.14	3/8	3/8
FA-6C-10	180	89	7.000	1.50	252	2.90	1.10	3/8	1/2
FA-6C-12M	180	89	8.400	1.58	353	3.00	1.15	3/8	1/2
FA-7E-1VF	180	87	7.000	2.01	307	3.10	1.40	3/8	1/2
FA-7E-6VF	180	87	7.600	2.17	307	3.10	1.40	3/8	1/2
FA-7E-8VF	180	87	8.400	2.17	307	3.10	1.40	3/8	1/2
FA-150KG-7	180	87	5.500	1.20	245	1.80	1.15	3/8	1/2
FA-150K-20	150	80	8.400	1.10	210	1.70	1.25	3/8	1/2
FA-9C-2M	230	106	5.900	2.10	309	4.60	1.40	1/2	1/2
FA-9C-4M	230	106	5.900	2.10	309	4.60	1.65	1/2	1/2

FG-5PX-1



Modelo	Capacidade Disco	Altura	Velocidade	Potência	Comprimento	Peso	Consumo de Ar	Encaixe da Mangueira	Mangueira
	mm	mm	rpm	Hp	mm	Kg	m³/min	PT	pol
FG-5PX-1	125	170	12.000	0.49	108	1.00	0.50	3/8	3/8

LIXADEIRAS / ESMERILHADEIRAS



FV-7-1M,4M



FV-7-2M




FV-9BH-1M

Modelo	Capacidade Disco	Altura do Ângulo	Velocidade	Potência	Comprimento	Peso	Consumo de Ar	Encaixe da Mangueira	Mangueira
	mm	mm	rpm	Hp	mm	Kg	m ³ /min	PT	pol
FV-7-1M	180	192	6.000	1.90	247	4.00	1.60	3/8	1/2
FV-7-2M	180	192	7.000	1.90	247	4.00	1.60	3/8	1/2
FV-7-4M	180	192	8.400	1.90	247	4.00	1.60	3/8	1/2
FV-9BH-1M	230	222	5.900	4.0	279	5.80	2.80	1/2	3/4



FV-9BH-4M

Height
Height is a distance from wheel flange to top.

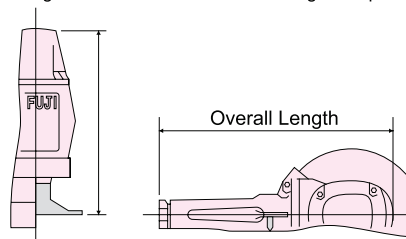

Modelo	Capacidade Disco	Altura do Ângulo	Velocidade	Potência	Comprimento	Peso	Consumo de Ar	Encaixe da Mangueira	Mangueira
	mm	mm	rpm	Hp	mm	Kg	m ³ /min	PT	pol
FV-9BH-4M	150	204	4.500	4	279	5.30	2.40	1/2	3/4



FBS-1-1, 2



FBS-1-4

Modelo	Tamanho da Cinta	Velocidade	Velocidade da Cinta	Potência	Comprimento	Peso	Consumo de Ar	Encaixe da Mangueira	Mangueira
	mm	min ⁻¹	m/min	Hp	mm	Kg	m ³ /min	PT	pol
FBS-1-1	10 x 330	20.000	1.200	0.37	281	1.1	0.57	3/8	3/8
FBS-1-2	20 x 520	20.000	1.200	0.37	375	1.2	0.57	3/8	3/8
FBS-1-4	20 x 460	20.000	1.200	0.37	345	1.2	0.57	3/8	3/8